
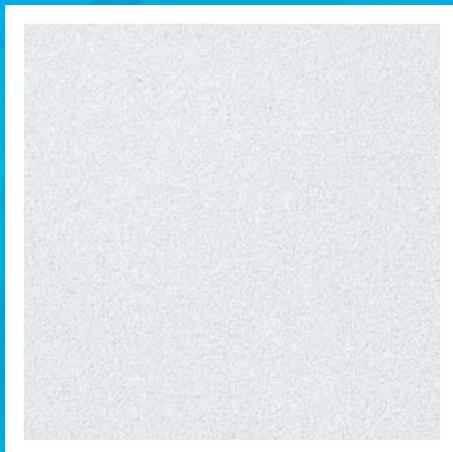





ARMSTRONG BIOGUARD ACOUSTIC

- Specially developed for controlled environment requiring acoustic flexibility
- Anti-microbial performance provides protection against bio-contamination
- Clean Room performance
- Durable, Washable, Smooth surface with 100% sealed edges.
- Total Acoustics Performance (NRC+CAC)
- High light reflective finish – 88%
- Humiguard Plus® (RH99) Performance



Panel Options	Board	Tegular 24	Tegular 15/90	Tegular 24/90
 Edge details	 24mm Tee Grid	 24mm Tee Grid	 15mm Tee Grid	 24mm Tee Grid
 Thickness (mm)	19mm	19mm	19mm	19mm
 Dimensions (mm)	600 x 600 1200 x 600	5186 5187	5188 5189	5190 5191 – 5193
 System	24mm exposed grid systems fully demountable	24mm exposed grid systems fully demountable	15mm exposed grid systems fully demountable	24mm exposed grid systems fully demountable
 Weight	5.0 kg/m ²			
 Colour	Global White			
 Sound absorption	NRC 0.70			
 Sound attenuation	39 dB			
 Fire reaction	CLASS 0/1 based on BS 476 Part 6 & 7			
 Light reflectance	≤ 88%			
 Thermal conductivity	$\lambda = 0.060 \text{ W/mk}$			
 Humidity resistance	RH99			
 Clean room	ISO 3 as per ISO 14644-1			
Durability	     			
Cleanability	    			
 Sustainability	 41%	Knauf Armstrong provides the widest range of products that have been third party tested and certified by industry leading Eco-classification		

Contact

For further details, please contact your local representative or email asia.support@knaufarmstrong.com