
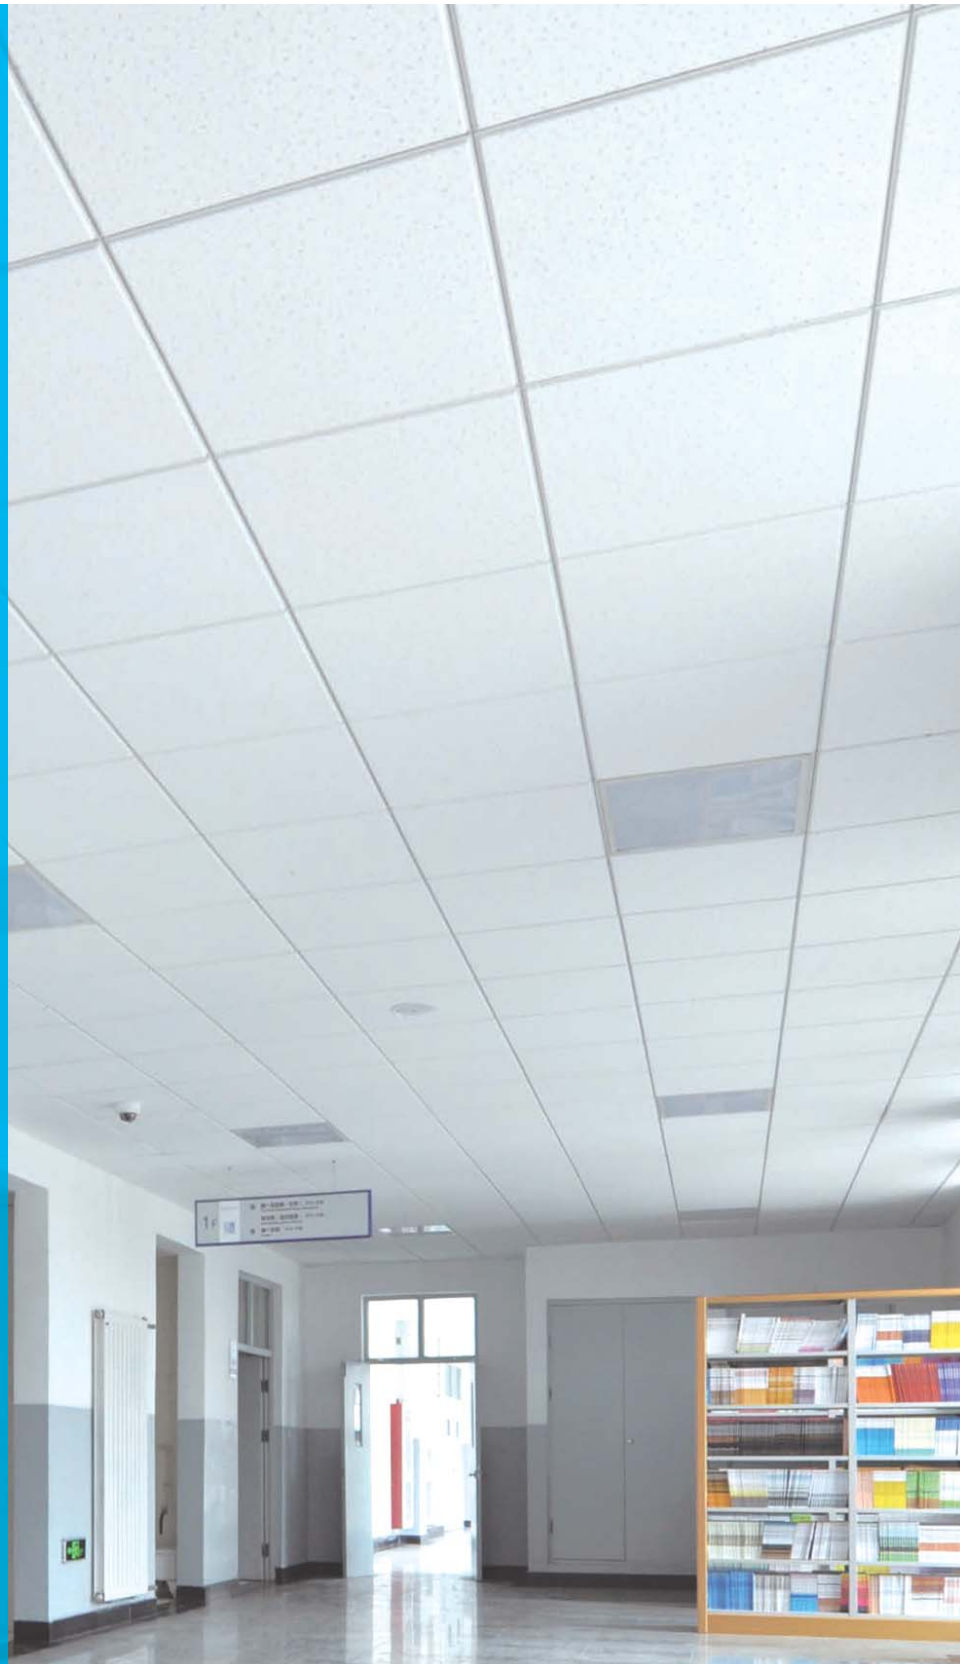


ARMSTRONG ANF

- Armstrong ANF offers a non-directional fissured surface and provides a cost-effective solution for standard sound absorption and attenuation
- Good sound absorption (NRC 0.50) and high sound attenuations (30 dB)
- Good light reflectance (85%)
- Humiguard Plus® (RH95) Performance

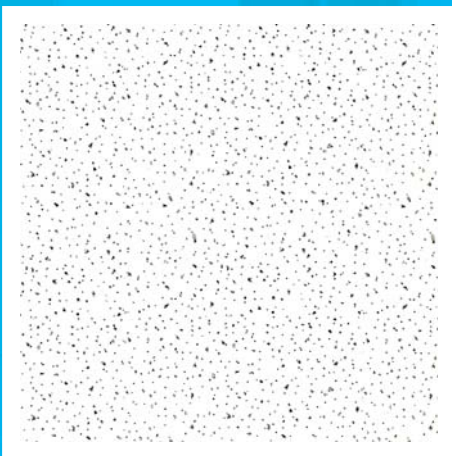

Panel Options	Board	Tegular 24	Bevelled Tegular 15
Edge details	 24mm Tee Grid	 24mm Tee Grid	 15mm Tee Grid
Thickness (mm)	15mm	15mm	15mm
Dimensions (mm)	600 x 600	8672	8678
	1200 x 600	8674	8679
	24 x 24 x 7/11"	8671	8677
	24 x 48 x 7/11"	8673	-
System	24mm exposed grid systems fully demountable	24mm exposed grid systems fully demountable	15mm exposed grid systems fully demountable
Weight	3.0 kg/m ²		
Colour	Global White		
Sound absorption	NRC 0.50		
Sound attenuation	30 dB		
Fire reaction	CLASS 0/1 based on BS 476 Part 6 & 7		
Light reflectance	≤ 85%		
Thermal conductivity	$\lambda = 0.052-0.057$ W/mk		
Humidity resistance	RH95		
Sustainability	Knauf Armstrong provides the widest range of products that have been third party tested and certified by industry leading Eco-classification ≤ 37%		

Note: ANF is a medium textured product with inherent fissures from production process which does not constitute as defect.

Contact

For further details, please contact your local representative or email asia.support@knaufarmstrong.com