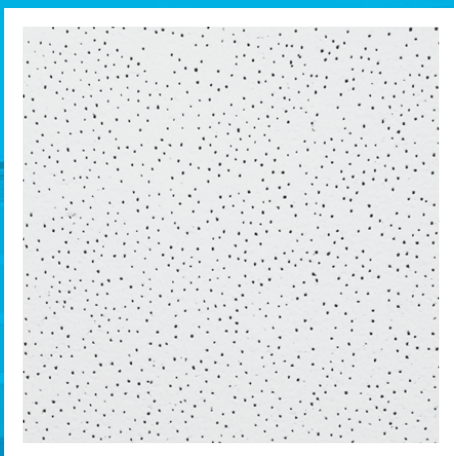





















ARMSTRONG CLASSIC LITE

- Armstrong CLASSIC LITE offers a non-directional pin-hole surface and provides a cost-effective solution for balance sound absorption and attenuation
- Good sound absorption (NRC 0.55) and high sound attenuations (33 dB)
- Good light reflectance (87%)
- Humiguard Plus® (RH99) Performance



ARMSTRONG CLASSIC LITE

Panel Options	Board	Tegular 24	Bevelled Tegular 15
 Edge details	 24mm Tee Grid	 24mm Tee Grid	 15mm Tee Grid
 Thickness (mm)	16mm	16mm	16mm
 Dimensions (mm)	600 x 600	1890M	1893M
	1200 x 600	1891M	-
	24 x 24 x 7/11"	1890	-
	24 x 48 x 7/11"	1891	-
 System	24mm exposed grid systems fully demountable	24mm exposed grid systems fully demountable	15mm exposed grid systems fully demountable
 Weight	3.19 kg/m ²		
 Colour	Global White		
 Sound absorption	NRC 0.55		
 Sound attenuation	33 dB		
 Fire reaction	CLASS 0/1 based on BS 476 Part 6 & 7		
 Light reflectance	≤ 87%		
 Thermal conductivity	$\lambda = 0.052-0.057 \text{ W/mk}$		
 Humidity resistance	RH99		
Durability			
Cleanability			
 Sustainability	 <p>Knauf Armstrong provides the widest range of products that have been third party tested and certified by industry leading Eco-classification</p>		
	≤ 39%		

Note: Classic Lite is a fine pin hole textured product with inherent fissures from production process which does not constitute as defect.

Contact

For further details, please contact your local representative or email asia.support@knaufarmstrong.com