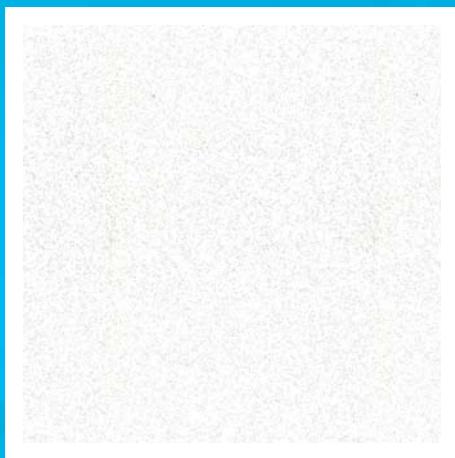






## ARMSTRONG OPTRA FG

- Suitable for open space & large circulation area requiring specialist acoustical performance
- Made from lightweight soft fiber with fully painted surface and edges.
- Customizable sizes & finishing available by request
- High light reflective finish for brighter space
- Humiguard Plus® (RH95) Performance



# ARMSTRONG OPTRA FG

**knaufceiling**  
Solutions

Panel Options	Board	Tegular 24	Tegular 15	SL2 / K2C2			
 Edge details	 24mm Tee Grid	 24mm Tee Grid	 15mm Tee Grid	 24mm Tee Grid			
 Thickness (mm)	15mm 20mm	15mm 20mm	15mm 20mm	20-25mm			
 Dimensions (mm)							
600 x 600	G600W060615	G600W060620	G600W060615TL	G600W060620TL	G600W060615ML	G600W060620ML	Available upon request
1200 x 600	G600W061215	G600W061220	G600W061215TL	G600W061220TL	G600W061215ML	G600W061220ML	Available upon request
1200 x 1200	-	G600W121220	-	G600W121220TL	-	G600W121220ML	Available upon request
 System	24mm exposed grid systems fully demountable	24mm exposed grid systems fully demountable	15mm exposed grid systems fully demountable	24mm exposed grid systems fully demountable			
 Weight	1.88 – 2.38 kg/m <sup>2</sup>						
 Colour	Global White (Black & RAL Colour available by request)						
 Sound absorption	NRC 0.90 (15mm) / 0.95 (20mm)						
 Sound attenuation	≤ 26 dB						
 Fire reaction	CLASS 0/1 based on BS 476 Part 6 & 7						
 Light reflectance	≤ 85%						
 Thermal conductivity	$\lambda = 0.052 - 0.057 \text{ W/mk}$						
 Humidity resistance	RH95						
Cleanability	 						
 Sustainability	 85%	Knauf Armstrong provides the widest range of products that have been third party tested and certified by industry leading Eco-classification					

## Contact

For further details, please contact your local representative or email [asia.support@knaufarmstrong.com](mailto:asia.support@knaufarmstrong.com)