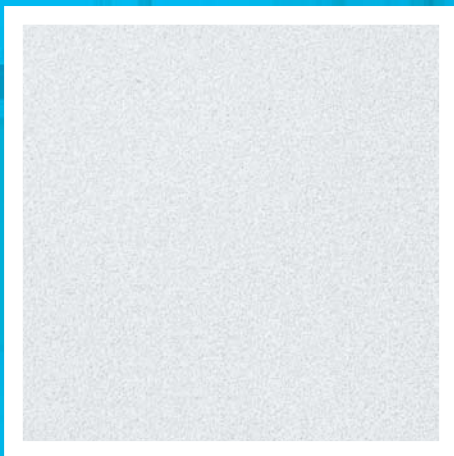























ARMSTRONG PERLA OP

- Armstrong PERLA OP is a lightweight wet-formed mineral with smooth laminated fleece
- Suitable for open space & large circulation area requiring good sound absorption and standard attenuation
- Clean Room performance.
- High light reflective finish for brighter space
- Humiguard Plus® (RH99) Performance



ARMSTRONG PERLA OP

Panel Options	Board	Tegular 24	Tegular 15/90
 Edge details	 24mm Tee Grid	 24mm Tee Grid	 15mm Tee Grid
 Thickness (mm)	15mm	15mm	15mm
 Dimensions (mm)	600 x 600	5173M	5174M
	1200 x 600	5177M	5178M
 System	24mm exposed grid systems fully demountable	24mm exposed grid systems fully demountable	15mm exposed grid systems fully demountable
 Weight	2.6 kg/m ²		
 Colour	Global White		
 Sound absorption	NRC 0.90		
 Sound attenuation	25 dB		
 Fire reaction	CLASS 0/1 based on BS 476 Part 6 & 7		
 Light reflectance	≤ 85%		
 Thermal conductivity	$\lambda = 0.04 \text{ W/mk}$		
 Humidity resistance	RH99		
 Clean room	ISO 5 as per ISO 14644-1		
Durability			
Cleanability	 		
 Sustainability	 EN ISO 14021 44%	Knauf Armstrong provides the widest range of products that have been third party tested and certified by industry leading Eco-classification	

Contact

For further details, please contact your local representative or email asia.support@knaufarmstrong.com